


NIPPON TEXTURED COATING SERIES

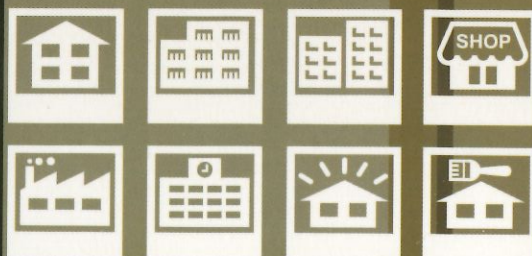

Manufacturer has been certified the ISO 14001:2004
Environmental Management Systems (EMS)

NIPPON TEXTURED COATING SERIES

Repaint




Old Paint

Sealer


First Coat

Second Coat

Colors



White



NP-YN01



NP-05Y09



NP-NN02



NP-NN03



NP-NN05



NP-05GY03



NP-NN08



NP-10B06



NP-NN10



NP-10B04



NP-05PB12



NP-NN07



NP-NN14



NP-NN16

All colours are subject to the original paint colour.

NIPPON TEXTURED COATING SERIES

Gloss Level (Color: NP-75B18)




Matt



Low Gloss(15-20%)



Semi-Gloss(35-45%)



Gloss (Over 60%)

Popular Colors



NP-10PB19



NP-05R20



NP-05R11



NP-05YR34



NP-10R18



NP-05P18



NP-05R27



NP-10RP10



NP-05YR33



NP-05YR41



NP-05P02



NP-05R09



NP-05R25



NP-10YR33



NP-25YR26



NP-05P09



NP-05RP01



NP-05YR09



NP-05YR10



NP-10YR11



NP-75B01



NP-05GY01



NP-10YR10



NP-10YR02



NP-10YR13



NP-75B03



NP-75GY02



NP-75YR27



NP-05Y05



NP-05YR13



NP-75B13



NP-05GY26



NP-05GY29



NP-05Y07



NP-10RP16



NP-05BG22



NP-125Y03



NP-10YR15



NP-NN12



NP-10R31


All colours are subject to the original paint colour.

NIPPON TEXTURED COATING SERIES

■ Texture Samples



Seed

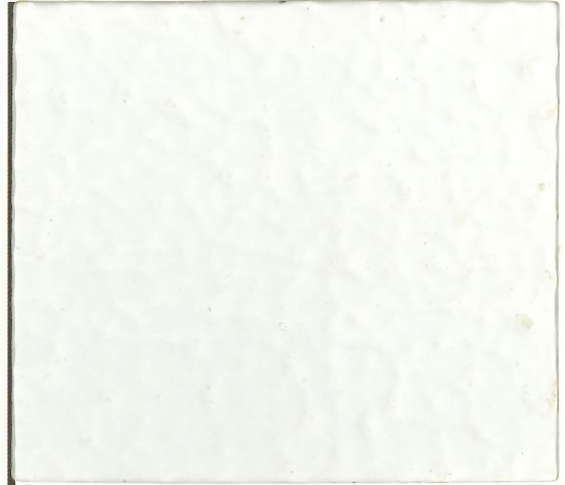

Roller Wave



Small



Small - Flat



Medium



Large

All colours are subject to the original paint colour.

NIPPON TEXTURED COATING SERIES

Description

Texture products are widely used in both interior and exterior area. We provide water-based Acrylic, Polyurethane, Silicone & Fluorocarbon top coat which can be applied on the top of texture, suitable apply in both new and repainting projects .

Standard Painting Specification

Applicable Substrates

- Concrete & plastered surfaces
- Panels & fiber board
- Ceiling board
- Timber panel
- Cement rendering
- Partition
- Mosaic tile

Standard Painting Systems

Substrate \ Coats	Tile Filler	Sealer	Texture	Mid-coat	Top Coat
New Surface w/o Texture		○		○	○
New Surface with Texture		○	○	○	○
Mosaic Tiles	○	○	○	○	○
Repaint w/o texture		○		○	○
Repaint with texture		○	○	○	○

Points for Application

Suggested Treatment

- Dirt/Powder — High-pressure wash (External). Clean with damp cloth (Internal). Mild detergent may be used. For powdery surface, a coat of sealer is recommended.
- Paint — Remove unstable film by high-pressure water wash, or scraper which ever is appropriate.
- Plaster — Remove by chisel, power grinder etc. Re-plaster to a stable surface with an approved mortar mixture.
- Moisture — High moisture causes paint defect. Make sure the surface is dry prior to subsequent paint mixture. All seepages must be checked and rectified.
- Fungus — Remove by high-pressure water wash & treat with NIPPON ANTI-FUNGUS SOLUTION. Rinse again with clean water and dry.
- Oil/Grease — Clean off with mild detergent and a little solvent. Wash thoroughly to remove all trace.

my inspiration, my Nippon Paint



NIPPON PAINT (H.K.) CO., LTD

Tel : (852) 2699 9333

Fax : (852) 2602 8844

Email : np@nipponpaint.com.hk

www.nipponpaint.com.hk