

NIPPON TEXTURED COATING SERIES



Manufacturer has been certified the ISO 14001:2004
Environmental Management Systems (EMS)

NIPPON TEXTURED COATING SERIES

■ Texture Samples




Seed



Roller Wave



Small

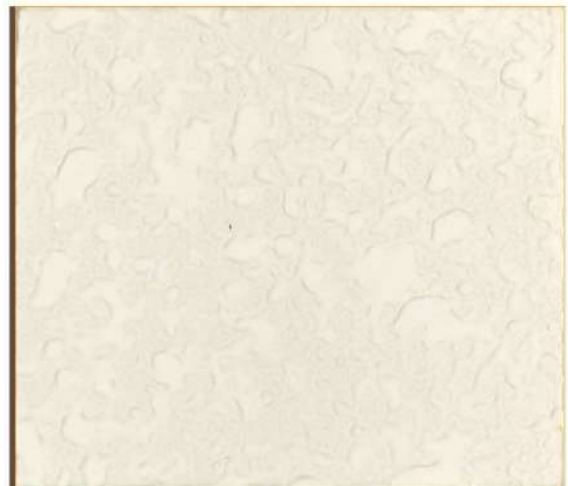

Small - Flat



Medium



Large

All colours are subject to the original paint colour.

Description

Texture products are widely used in both interior and exterior area. We provide water-based Acrylic, Polyurethane, Silicone & Fluorocarbon top coat which can be applied on the top of texture, suitable apply in both new and repainting projects .

Standard Painting Specification

Applicable Substrates

- Concrete & plastered surfaces
- Panels & fiber board
- Ceiling board
- Timber panel
- Cement rendering
- Partition
- Mosaic tile

Standard Painting Systems

Substrate \ Coats	Tile Filler	Sealer	Texture	Mid-coat	Top Coat
New Surface w/o Texture		○		○	○
New Surface with Texture		○	○	○	○
Mosaic Tiles	○	○	○	○	○
Repaint w/o texture		○		○	○
Repaint with texture		○	○	○	○

Points for Application

Suggested Treatment

- Dirt/Powder — High-pressure wash (External). Clean with damp cloth (Internal). Mild detergent may be used. For powdery surface, a coat of sealer is recommended.
- Paint — Remove unstable film by high-pressure water wash, or scraper which ever is appropriate.
- Plaster — Remove by chisel, power grinder etc. Re-plaster to a stable surface with an approved mortar mixture.
- Moisture — High moisture causes paint defect. Make sure the surface is dry prior to subsequent paint mixture. All seepages must be checked and rectified.
- Fungus — Remove by high-pressure water wash & treat with NIPPON ANTI-FUNGUS SOLUTION. Rinse again with clean water and dry.
- Oil/Grease — Clean off with mild detergent and a little solvent. Wash thoroughly to remove all trace.

my inspiration, my Nippon Paint

NIPPON PAINT (H.K.) CO., LTD

Tel : (852) 2699 9333

Fax : (852) 2602 8844

Email : np@nipponpaint.com.hk

www.nipponpaint.com.hk